Inta Drain Combined Anti-Tamper Isolation & Drain Valve


Introducing the new Inta Drain. A compact, convenient solution featuring a swivel vessel connection, rotatable drain-off valve and anti-tamper isolation valve.



- Supplied with a BS EN ISO 228 G3/4" swivel connection for the expansion vessel
- Rotatable drain-off valve enables simple, quick, clean servicing or replacement of the expansion vessel
- Anti-tamper isolation valve enhances system safety and compliance while preventing unauthorised adjustment
- Supplied with either 22mm, 28mm, 3/4" or 1" direct circuit connection removing the need for additional time consuming and costly pipework connections
- Suitable for potable systems
- Max static pressure of 16 bar
- WRAS Approved

Note: Potable cold water should have a maximum temperature of 20°C to prevent bacterial growth. The assembly is cable of with standing temperatures of up to 85°C if used on of applications or services.

Code	Description
KTPEVI34	3/4" Expansion Vessel Combined Anti-Tamper Isolation & Drain Valve
KTPEVI22	22mm Expansion Vessel Combined Anti-Tamper Isolation & Drain Valve
KTPEV1	1" Expansion Vessel Combined Anti-Tamper Isolation & Drain Valve
KTPEV28	28mm Expansion Vessel Combined Anti-Tamper Isolation & Drain Valve

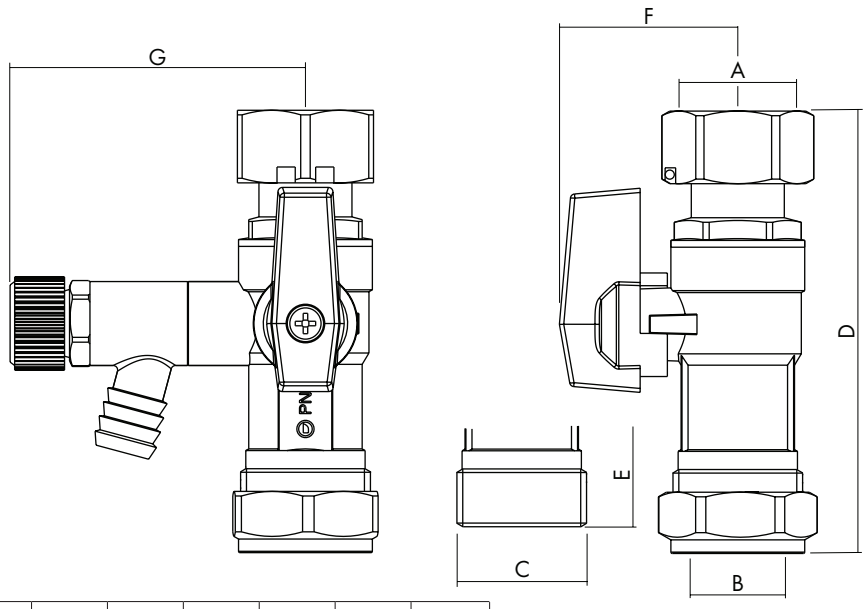

Code	A	B	C	D	E	F	G
KTPEVI22	G¾	Ø22		94		36	63-68
KTPEVI34	G¾		G¾		83	36	64-69
KTPEV28	G1	Ø28		104		38	65-70
KTPEV1	G1		G1		92	37	65-70

Intatec, Airfield Industrial Estate, Hixon, Stafford, ST18 0PF
T. 01889 272180 E. sales@intatec.co.uk W. www.intatec.co.uk