


IntaDrain Combined Anti-Tamper Isolation Valve and Drain

KTPEVI22, KTPEVI34, KTPEV28 & KTPEV1

Installation and Operation Instructions

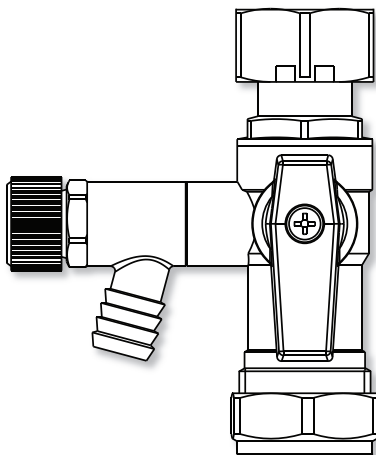

In this procedure document we have endeavoured to make the information as accurate as possible.

We cannot accept any responsibility should it be found that in any respect the information is inaccurate or incomplete or becomes so as a result of further developments or otherwise.

Intatec Ltd
Airfield Industrial Estate
Hixon
Staffordshire
ST18 0PF

Tel: **01889 272 180**
email: **sales@intatec.co.uk**
web: **www.intatec.co.uk**

Introduction

The IntaFill KTPEV expansion vessel isolation valve with drain and female swivel joint combines several features into one assembly.

The KTPEV is intended for potable water service.

Available with compression fitting or male threaded outlet connection.

These instructions cover the installation and operation. Please read the enclosed instructions before commencing the installation of this product, please note;

We recommend that the installation of any Inta product is carried out by an approved installer.

It is recommended, especially in hard water areas, that a water softener such as the ActivFlo or ActivFlo lite be fitted to reduce the risk of calcium deposits forming.

Products


Expansion vessel isolation valve with drain 22mm x 3/4" female swivel	KTPEVI22
Expansion vessel isolation valve with drain 3/4" male x 3/4" female swivel	KTPEVI34
Expansion vessel isolation valve with drain 28mm x 3/4" female swivel	KTPEV28
Expansion vessel isolation valve with drain 1" male x 3/4" female swivel	KTPEV1

Technical Specification

Max. pressure - static:	16 bar
Max. temperature:*	85 °C
Medium:	Potable water
Compression connections:	BS EN 1254-2
Threaded connection:	BS EN ISO 228

* potable cold water should have a maximum temperate of 20 °C to prevent bacterial growth. The assembly is capable of with standing higher temperatures if used on other services.

Dimensions

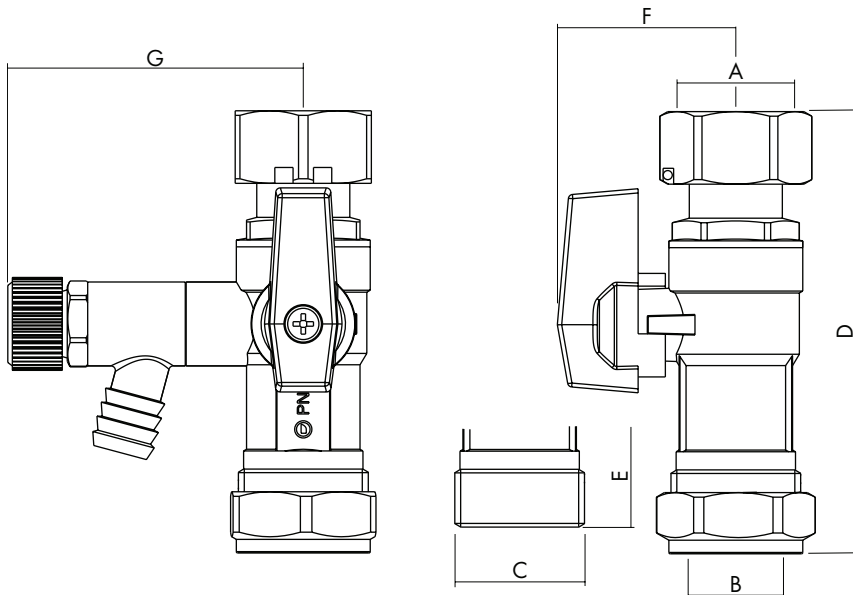

Code	A	B	C	D	E	F	G
KTPEVI22	G $\frac{3}{4}$	Ø22		97.5		39.3	65.1
KTPEVIs34	G $\frac{3}{4}$		G $\frac{3}{4}$		87.4	39.3	65.1
KTPEV28	G $\frac{3}{4}$	Ø28		97.5		39.3	65.1
KTPEV1	G $\frac{3}{4}$		G1		87.4	39.3	65.1

Installation

The KTPEV isolation valve with drain is intended to connect directly to a WRAS approved expansion vessel on potable water service.

The swivel joint connects directly to the expansion vessel with a G $\frac{3}{4}$ thread.

The inlet connection can be either a 22mm or 28mm compression joint or a G $\frac{3}{4}$ or G1 male thread suitable for a swivel joint connector or other pipe fitting

The KTPEV should ideally be installed vertically beneath the expansion vessel although it can be used in other orientation provided that the drain outlet points vertically downwards.

The outlet from the drain is rotatable allowing the hose to be easily attached and directed to a suitable drain.

The compression ends comply with BS EN 1254-2 for use with R250 (half hard) copper tube.


Ball Valve Locking

The ball isolating valve only locks in the open position and operated in a third by unscrewing the lever retaining screw, removing the lever and repositioning in the required position or operating the valve.

Locked - in the locked position the valve cannot be operated and the flow is straight through the valve into the expansion vessel. The lever is locked in the open position by replacing the retaining screw.

Unlocked - in the unlocked position the valve can be rotated clockwise from open to the closed and back again as required.

Isolated - in the isolated position the valve is closed and the expansion vessel isolated.

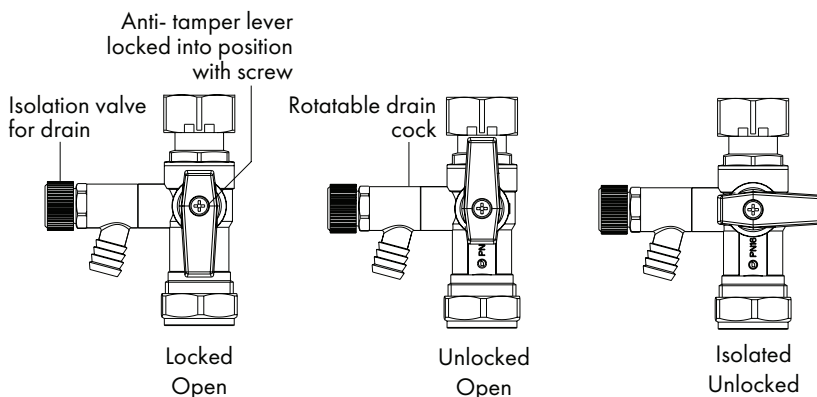

Notes

Notes:

Notes:

Please leave this Manual for the User

To activate your product warranty please visit
www.intatec.co.uk
and click on Product Registration



inta
DRAIN

Intatec Ltd

Airfield Industrial Estate
Hixon
Staffordshire
ST18 0PF

Tel: **01889 272 180**

email: **sales@intatec.co.uk**

web: **www.intatec.co.uk**

E & O.E