

## NON-CONCUSSIVE BASIN TAP (PAIR) NC600CP

Self closing basin tap (pair) with push button operation and 4l/min flow restriction



- Simple push button operation with timed automatic shut off
- Pre-installed 4l/min flow regulators, help reduce water wastage
- Designed for use with the Intamix range of thermostatic mixing valves
- Suitable for commercial and high-use washrooms
- Supplied as a pair with interchangeable red and blue indices included.
- One year commercial warranty
- Approximately 15 second flow time at 3 bar (dynamic)

### Approvals / Standards:

BS EN 816:2017, BS EN 248:2002

## Product Range

| Code    | Description                     |
|---------|---------------------------------|
| NC600CP | NON-CONCUSSIVE BASIN TAP (PAIR) |

## Technical Data

|                         |                 |
|-------------------------|-----------------|
| Min. Inlet Pressure:    | 1 bar (dynamic) |
| Max. Inlet Pressure:    | 5 bar (dynamic) |
| Max. Inlet Temperature: | 65°C            |
| Flow Time at 3 bar:     | 15 ± 5 sec      |
| Inlet Connection:       | 1/2" BSP        |
| Max. Basin Thickness:   | 26mm            |


## Materials

- ZHPb59-1
- SUS302
- Zinc
- ABS
- NBR
- SBR
- Molykote111

## Flow Rates

| Flow rate (l/min) |     |      |      |      |      |
|-------------------|-----|------|------|------|------|
| Pressure (bar)    | 1   | 2    | 3    | 4    | 5    |
| Flow Restrictor   | 4   | 4    | 4    | 4    | 4    |
| Unrestricted      | 9.1 | 11.8 | 14.1 | 15.9 | 16.9 |

## Dimensions

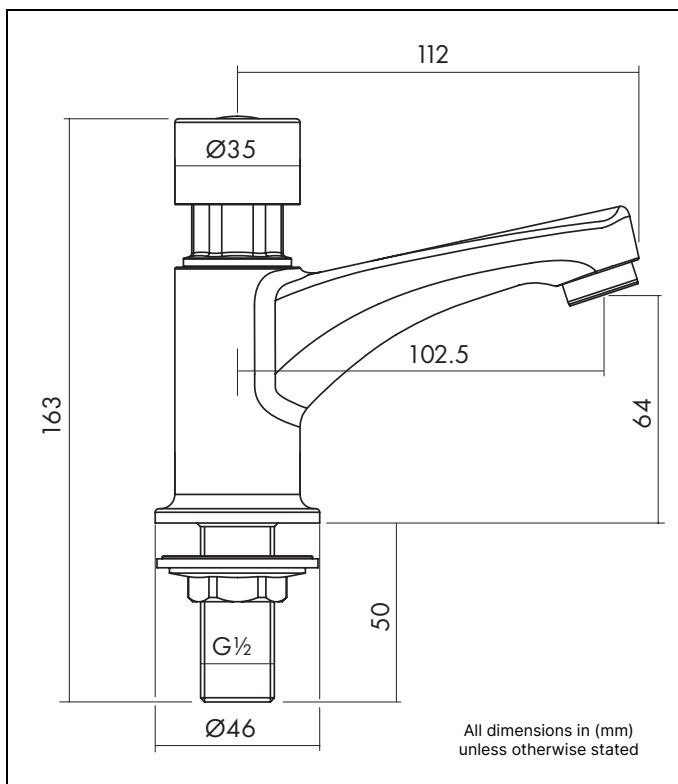

\*Flow rates are for guidance only and may vary depending on system design, installation conditions, and operating pressures\*