

NON-CONCUSSIVE BASIN TAP (PAIR) NC600CP

Self closing basin tap (pair) with push button operation and 4l/min flow restriction



- Simple push button operation with timed automatic shut off
- Pre-installed 4l/min flow regulators, help reduce water wastage
- Designed for use with the Intamix range of thermostatic mixing valves
- Suitable for commercial and high-use washrooms
- Supplied as a pair with interchangeable red and blue indices included.
- One year commercial warranty
- Approximately 15 second flow time at 3 bar (dynamic)

Approvals / Standards:

BS EN 816:2017, BS EN 248:2002



Product Range

Code	Description
NC600CP	NON-CONCUSSIVE BASIN TAP (PAIR)

Technical Data

Min. Inlet Pressure:	1 bar (dynamic)
Max. Inlet Pressure:	5 bar (dynamic)
Max. Inlet Temperature:	65°C
Flow Time at 3 bar:	15 ± 5 sec
Inlet Connection:	1/2" BSP
Max. Basin Thickness:	26mm


Materials

- ZHPb59-1
- SUS302
- Zinc
- ABS
- NBR
- SBR
- Molykote111

Flow Rates

Flow rate (l/min)					
Pressure (bar)	1	2	3	4	5
Flow Restrictor	4	4	4	4	4
Unrestricted	9.1	11.8	14.1	15.9	16.9

Dimensions

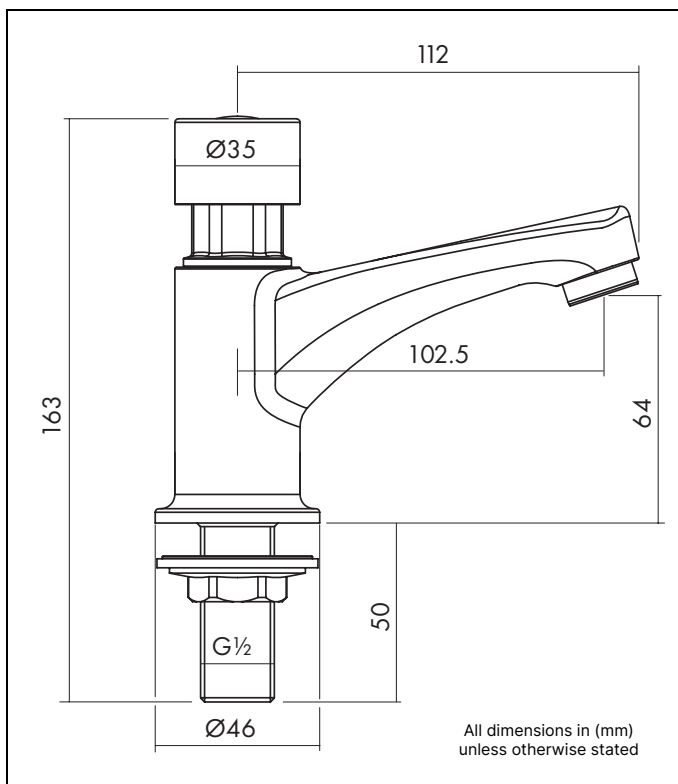

Flow rates are for guidance only and may vary depending on system design, installation conditions, and operating pressures