




Product

IT1007CP - Intatherm Safe Touch Sequential Thermostatic Mixer Tap with Peg Lever

Technical Specification

Max Inlet Pressure (static):	10 Bar
Min Inlet Pressure (dynamic):	0.2 Bar
Max Inlet Temperature:	85°C
Factory Pre-set Temperature:	43°C with max temp stop
Temperature Stability:	+/-2°C
Max Pressure Inlet Differential:	5:1
Min temperature differential between hot inlet and mixed outlet to achieve cold water failsafe:	10°C

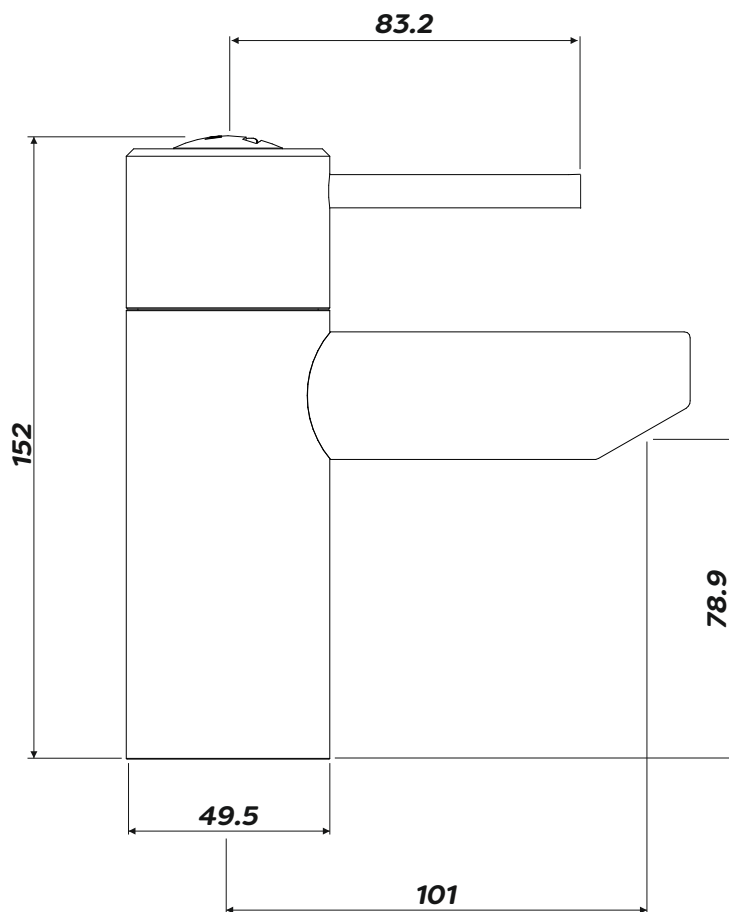

Additional Information

Thermostatic sequential control

Anti-scald failsafe technology

WRAS & TMV3 approved

Self draining spout

Sturdy metal handle

Simple smooth operation

Safe touch body, surface remains cool to touch during operation

Copper inlet tails

Flow Rates (Open Outlet)

Pressure (Bar)	0.25	0.5	0.75	1.0	1.5	2.0	2.5	3.0	3.5	4.0
Bottom Outlet (L/m)	7.4	9.2	11.5	13.4	14.9	16.8	19.5	21.3	23.3	25.2

For more information please scan:



Intatec, Airfield Industrial Estate, Hixon, Stafford, ST18 0PF
T. 01889 272180 F. 01889 272181 E. sales@intatec.co.uk
www.intatec.co.uk