


- Solid brass construction
- Allows simple and easy filling & flushing in one convenient fitting
- Available with 22mm or 28mm compression fittings
- Complete with cover caps to stop dust build up or accidental discharge when not in use
- Compression connections comply with BS EN 1252-2

Product Range

Code	Description
INFAF22	22mm Fill & Flush Valve
INFAF28	28mm Fill & Flush Valve

Technical Features

Maximum Inlet Pressure:	16 Bar
Working Temperature:	-5 to 99°C
Medium:	Water / Glycol up to 50%
Compression Connections:	BS EN 1252-2

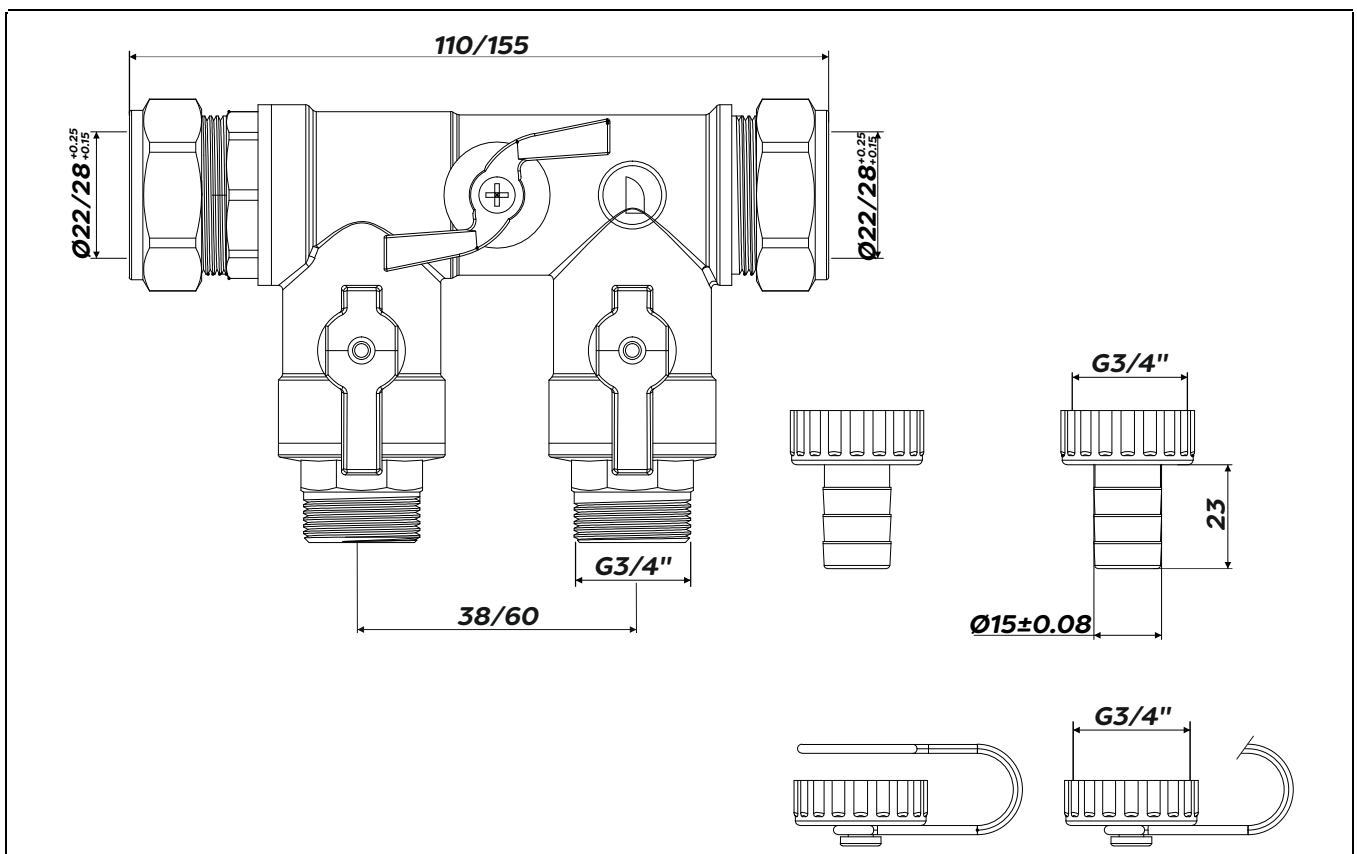

Application Diagrams

