



Product


SP9301CP - Wall Mounted Thermostatic Shower Panel in Stainless Steel with Riser Rail, Handset and Hose

Technical Specification

Max Inlet Pressure (static):	6 Bar
Min Inlet Pressure (dynamic):	1 Bar
Max Inlet Temperature:	90°C
Factory Pre-set Temperature:	41±1°C
Temperature Stability:	±2°C
Inlet Connections:	15mm Compression
Outlet Connection:	1/2" M
Flow rate with flow regulator:	7 l/min
Min temperature differential between the hot inlet and mixed outlet to achieve cold water failsafe:	10°C

Dimensions

Enlarged view showing internal pipe connections

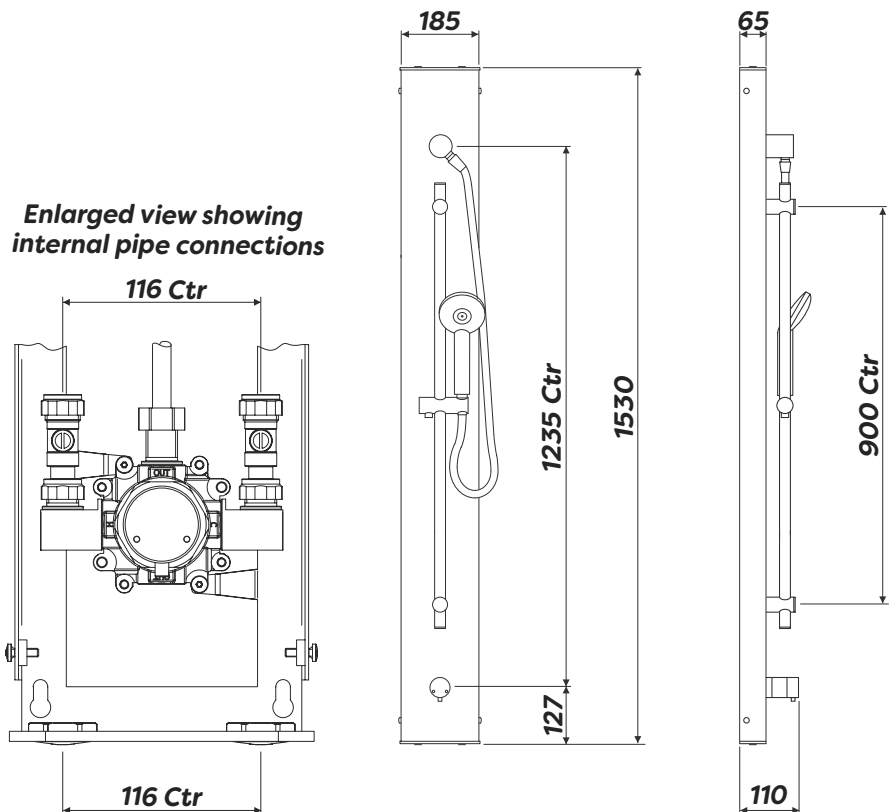

Additional Information

Temperature adjustable

Stainless steel panel

Thermostatic control

Anti scald failsafe technology

WRAS approved

Built in isolation valves

Rotatable elbows to enable top or bottom entry



Scan for further information

Intatec, Airfield Industrial Estate, Hixon, Stafford, ST18 0PF

T. 01889 272180 F. 01889 272181 E. sales@intatec.co.uk

www.intatec.co.uk