UNVENTED GROUP SETS

Image Shown: UVGS21822220.1



Image Shown: UVGS21822200.1 & UVGS21822210.1



Image Shown: UVGS21822260.1



PRODUCT

UVGS21822260.1
22mm Unvented Group Set Without Expansion Vessel Connection (SRV 6 Bar)

UVGS21822210.1
22mm Unvented Group Set with 3/4" Expansion Vessel Connection (SRV 6 Bar)

UVGS21822220.1
22mm Unvented Group Set with 22mm Expansion Vessel Connection (SRV 6 Bar)

UVGS21822200.1
22mm Unvented Group Set with 3/4" Expansion Vessel Connection (SRV 4.75 Bar)

TECHNICAL SPECIFICATION

Maximum inlet pressure (static):	16 Bar
Factory set PRV outlet pressure:	3 Bar
SRV discharge pressure:	4.75 or 6 Bar
Maximum operating temperature:	80°C
Minimum operating temperature:	4°C
Maximum closing differential of SRV:	20%

ADDITIONAL INFORMATION


- Includes a balanced cold feed connection
- 300 micron stainless steel mesh filter
- Combines a PRV, SRV, check valve and filter in one fitting
- Controls inlet pressure to unvented hot water systems
- Available with compression, female or no vessel connection

INTATEC LIMITED
Airfield Industrial Estate, Hixon, Staffordshire ST18 0PF
t. 01889 272180 e. sales@intatec.co.uk www.intatec.co.uk


Proud to be a leading British Brand

Scan for more information


DIMENSIONS - UVGS21822260.1

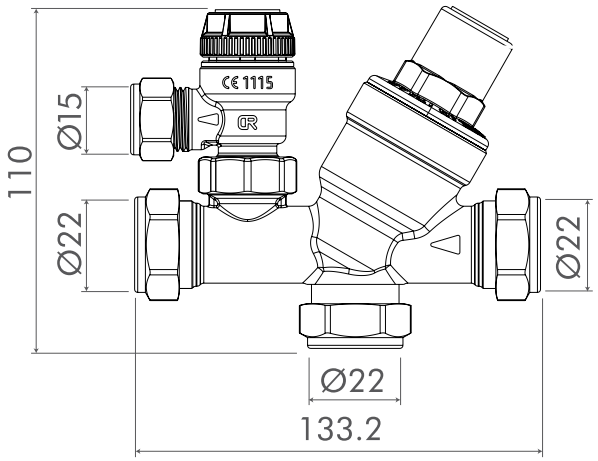


DIMENSIONS - UVGS21822220.1

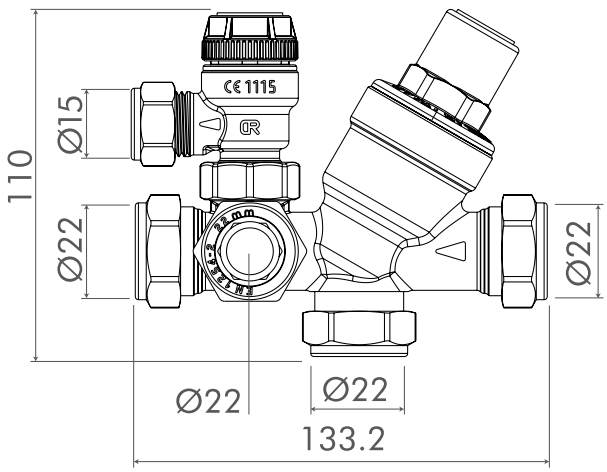

DIMENSIONS - UVGS21822210.1

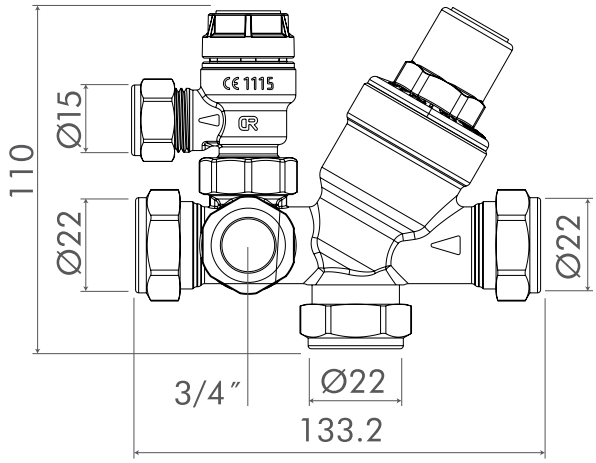

DIMENSIONS - UVGS21822200.1

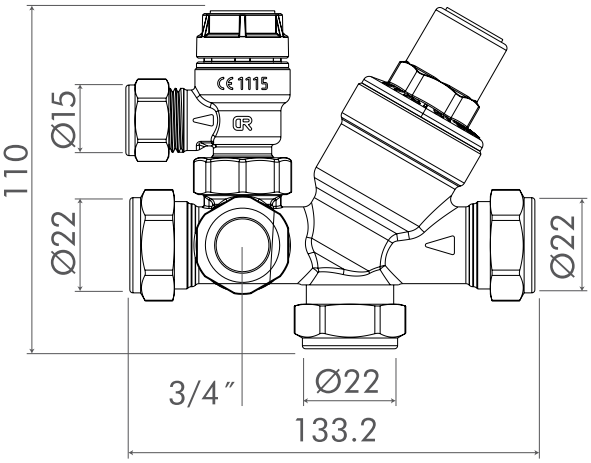

inta

INTATEC LIMITED

Airfield Industrial Estate, Hixon, Staffordshire ST18 0PF

t. 01889 272180 e. sales@intatec.co.uk www.intatec.co.uk

Proud to be a leading British Brand

Scan for more information