



## Product

YPCART1550 - 15mm Y-Pattern Strainer Cartridge (50 Micron)  
 YPCART2250 - 22mm Y-Pattern Strainer Cartridge (50 Micron)


YPS085815100 - 15mm Y-Pattern Strainer (100 Micron)  
 YPS085822100 - 22mm Y-Pattern Strainer (100 Micron)  
 YPS085828100 - 28mm Y-Pattern Strainer (100 Micron)  
 YPS0858050100 - 1/2" F x F Y-Pattern Strainer (100 Micron)  
 YPS0858075100 - 3/4" F x F Y-Pattern Strainer (100 Micron)  
 YPS0858100100 - 1" F x F Y-Pattern Strainer (100 Micron)  
 YPS0858125100 - 1 1/4" F x F Y-Pattern Strainer (100 Micron)  
 YPS0858150100 - 1 1/2" F x F Y-Pattern Strainer (100 Micron)  
 YPS0858200100 - 2" F x F Y-Pattern Strainer (100 Micron)

YPS085815800 - 15mm Y-Pattern Strainer (800 Micron)  
 YPS085822800 - 22mm Y-Pattern Strainer (800 Micron)  
 YPS085828800 - 28mm Y-Pattern Strainer (800 Micron)  
 YPS0858050800 - 1/2" F x F Y-Pattern Strainer (800 Micron)  
 YPS0858075800 - 3/4" F x F Y-Pattern Strainer (800 Micron)  
 YPS0858100800 - 1" F x F Y-Pattern Strainer (800 Micron)  
 YPS0858125800 - 1 1/4" F x F Y-Pattern Strainer (800 Micron)  
 YPS0858150800 - 1 1/2" F x F Y-Pattern Strainer (800 Micron)  
 YPS0858200800 - 2" F x F Y-Pattern Strainer (800 Micron)


## Technical Specification

Max Inlet Pressure (static): **16 Bar**  
 Max Inlet Temperature: **100°C**  
 Seal: **NBR O-ring**

Connection	A	B
15mm	77	57
22mm	93	70
28mm	114	78

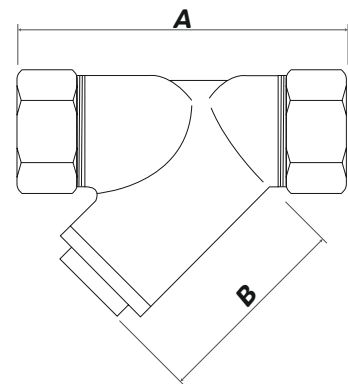

Connection	A	B
1/2" FxF	44	57
3/4" FxF	53	70
1" FxF	56	78
1 1/4" FxF	70	97
1 1/2" FxF	80	106
2" FxF	95	126

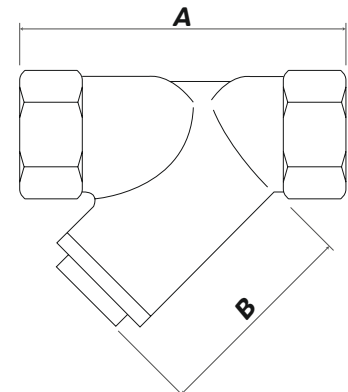

## Additional Information

Passively filter debris and particles in the system

Convenient in-line design

Easily accessible filter makes servicing quick and simple

Available in a range of sizes with either 50, 100 or 800 micron filters

Spare strainer baskets available