




Product

VR992CP - Vandal Resistant Shower Head

Technical Specification

Max Operating Pressure (Dynamic):	10 Bar
Min Operating Pressure (Dynamic):	0.2 Bar
Max Inlet Temperature:	65°C
Max Wall Thickness:	24mm
Body Material:	Brass
Finish:	High polished chrome
Hidden wall fixing for security	

Drawing

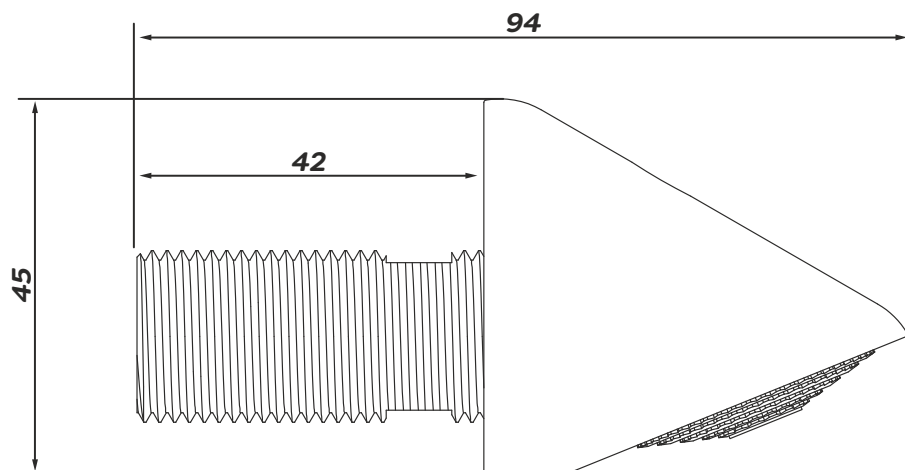

Additional Information

Inlet connection can be rotated with the options of 15mm compression or G $\frac{1}{2}$ "

Sealed internally with $\frac{1}{2}$ " rubber washer

Vandal resistant

Designed to be used with the intamix thermostatic mixing valves


Suitable for use in schools, hospitals, sports and leisure facilities and other areas where there is risk of misuse

Anti ligature model available

Unique Head design

Full range of shower controls and flow regulating isolation valves available to suite application.

VR992CP Flow Rates

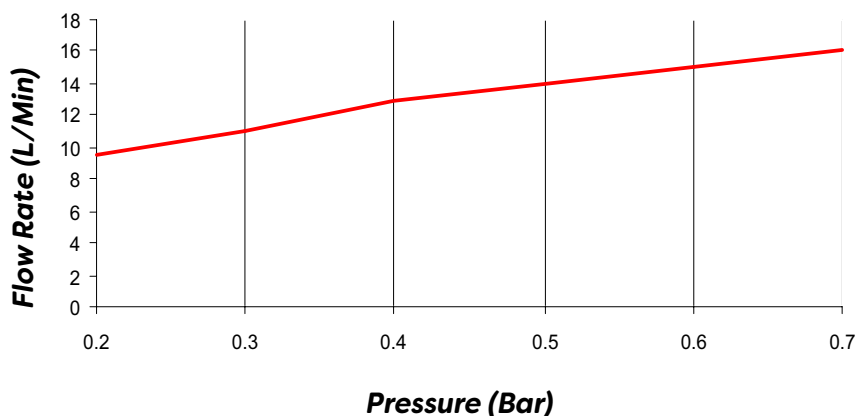

Scan for Further Information

Intatec, Airfield Industrial Estate, Hixon, Stafford, ST18 0PF

T. 01889 272180 E. sales@intatec.co.uk

www.intatec.co.uk