inta

Product

NC230CP - Non Concussive Basin Mounted Tap with Adjustable Temperature Control Flexible Tails

NC230CT - Non Concussive Basin Mounted Tap with Adjustable Temperature Control Copper Tails

Technical Specification

Max Inlet Pressure (static):	6 Bar
Min Inlet Pressure (dynamic):	1 Bar
Max Inlet Temperature:	65°C
Inlet Connections:	M10 x G1/2" Flexible Tails (CP)
	M10 x G1/2" Copper Tails (CT)
Max Basin Thickness:	45mm
Timed Flow At 3 Bar:	15 ± 5 seconds

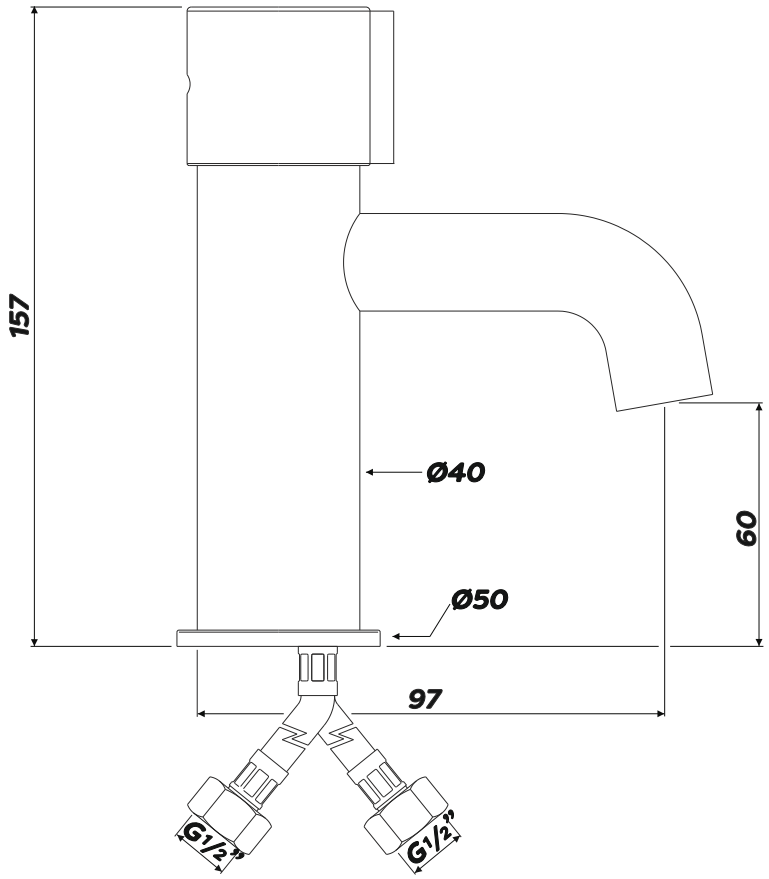

Fixing Assembly



Additional Information

Non concussive operation

Adjustable temperature control

Operating pressure range of 1 to 6 bar (dynamic)

Flow time = 15 seconds ±5 seconds at 3 Bar (dynamic)

Easy to operate handle

WRAS approved

Scan for Spares Sheet

Scan for Installation & Maintenance Instructions

Intatec, Airfield Industrial Estate, Hixon, Stafford, ST18 0PF
T. 01889 272180 F. 01889 272181 E. sales@intatec.co.uk
www.intatec.co.uk

07/24
E&OE