



Made for the



inta
TRADE-TEC

TRADE-TEC PLUMBING AND HEATING RANGE

Intatec's Trade-Tec collection of plumbing and heating products has been specifically designed and engineered to meet the exacting requirements of the professional installer, offering quick, easy fit and forget solutions that are affordable, reliable and compliant.

Intatec's Trade-Tec collection offers the highest standards of performance, reliability and service. Our Plumbing and Heating range is guaranteed for two years from the date of purchase* when fitted in accordance with installation instructions and best working practice (guaranteed for local water bylaws).

Intatec Limited are approved under the terms of the scheme for Management Systems to ISO 14001, ISO 9001 and ISO 45001.



2 YEAR WARRANTY

Products in our Trade-Tec Plumbing section are guaranteed for 2 years from the date of purchase



INSTALLER HELPLINE

Contact our dedicated technical helpline for installer support.

☎ 01889 272 199
✉ technical@intatec.co.uk




THERMOSTATIC RADIATOR VALVES

2 YEAR WARRANTY


TRISTWINA

15MM I-TEC ANGLED THERMOSTATIC RADIATOR VALVE WITH LOCKSHIELD

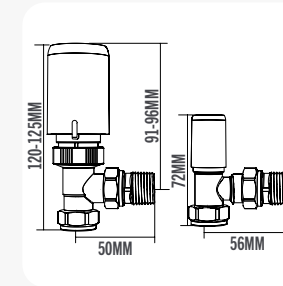

TECHNICAL INFORMATION


Maximum Operating Pressure: 10 Bar
Maximum Differential Pressure: 1 Bar
Maximum Inlet Temperature: 120°C
Temperature Range: 7-29°C
Frost Protection: 7°C
Hysteresis: 0,50K

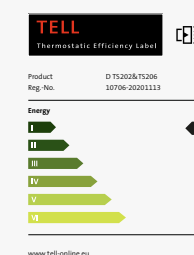

BOX OF
32
ONLY


TRISATRIV

15MM I-TEC ANGLED THERMOSTATIC RADIATOR VALVE

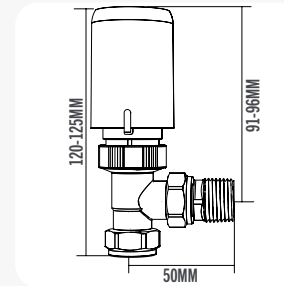

TECHNICAL INFORMATION

Maximum Operating Pressure: 10 Bar
Maximum Differential Pressure: 1 Bar
Maximum Inlet Temperature: 120°C
Temperature Range: 7-29°C
Frost Protection: 7°C
Hysteresis: 0,50K

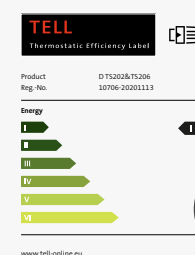

BOX OF
32
ONLY




MANUAL RADIATOR VALVES

2 YEAR WARRANTY

MRV15STR (WHITE) • MRV15STRCP (CHROME)

15MM STRAIGHT MANUAL RADIATOR VALVE

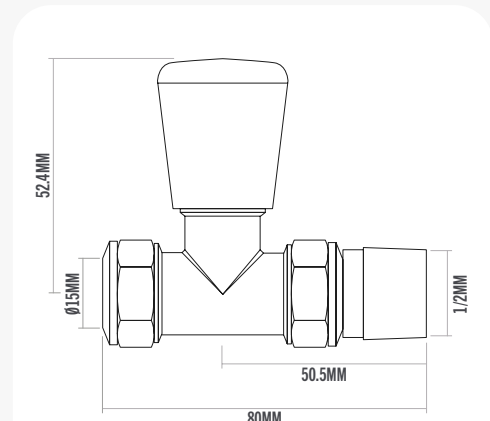

TECHNICAL INFORMATION

Maximum Operating Pressure: 10 Bar
Maximum Temperature: 100°C

BOX OF
20
ONLY



MANUAL RADIATOR VALVES


2 YEAR WARRANTY

MRV15 (WHITE) • MRV15CP (CHROME) 15MM ANGLED MANUAL RADIATOR VALVE



TECHNICAL INFORMATION

Maximum Operating Pressure: 10 Bar
Maximum Temperature: 100°C

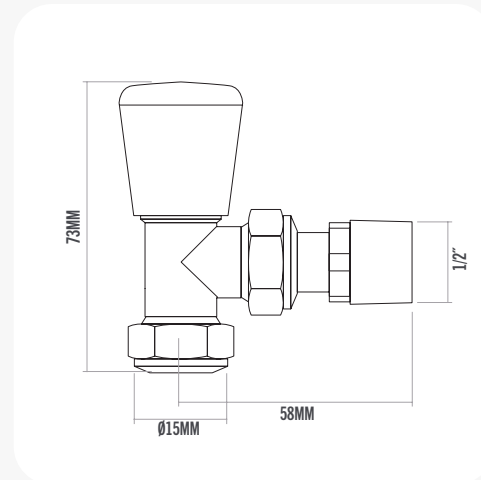

BOX OF
20
ONLY



KEY TYPE BALL VALVES

2 YEAR WARRANTY



TR15KBV • TR22KBV • TR28KBV • TR35KBV

BOX OF
8
ONLY

BOX OF
5
ONLY

BOX OF
5
ONLY


BOX OF
3
ONLY

EXTENDED BALL VALVE K TYPES



TECHNICAL INFORMATION

Maximum Operating Pressure: 25 Bar
Maximum Inlet Temperature: 110°C
Supplied With A Red And Blue Dust Cover To Suit Installation
While Protecting The Valve

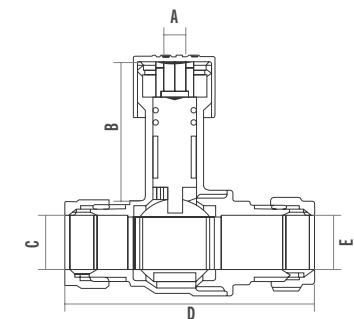

Size	A	B	C	D	E
15mm	SW6	38 ±0.5	Ø14.5mm	64.9mm	Ø15.15mm
22mm	SW6	38 ±0.5	Ø20mm	85.6mm	Ø22.2mm
28mm	SW6	43 ±0.5	Ø24mm	90.4mm	Ø28.3mm
35mm	SW6	43 ±0.5	Ø35.15mm	105.7mm	Ø30mm




Key for extended ball valves
available **TRBVKEY**

BOX OF
1
ONLY

MRV10

10MM ANGLED MANUAL RADIATOR VALVE

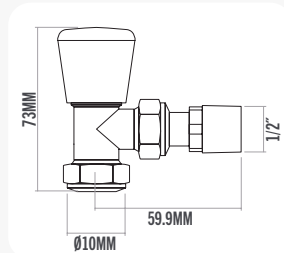


TECHNICAL INFORMATION

Maximum Operating Pressure: 10 Bar
Maximum Temperature: 100°C

BOX OF
20
ONLY

MRV10DO • MRV15DO

10MM / 15MM ANGLED MANUAL RADIATOR VALVE WITH DRAIN-OFF TAIL

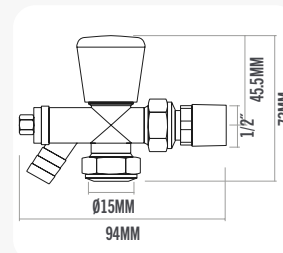

TECHNICAL INFORMATION

Maximum Operating Pressure: 10 Bar
Maximum Temperature: 100°C

BOX OF
20
ONLY




BUTTERFLY HANDLE BALL VALVES

2 YEAR WARRANTY



TR15BBV

15MM FULL BORE COMPRESSION BALL VALVE WITH BLUE & RED BUTTERFLY HANDLE

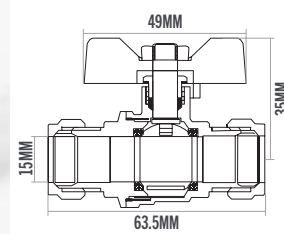


TECHNICAL INFORMATION

Maximum Operating Pressure: 25 Bar
Working Temperature Range -10°C to 110°C
Supplied With Red & Blue Handle

BOX OF
12
ONLY

TR22BBV

22MM FULL BORE COMPRESSION BALL VALVE WITH BLUE & RED BUTTERFLY HANDLE

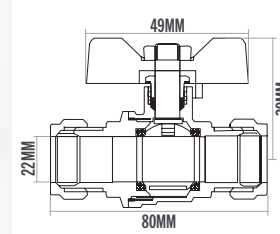

TECHNICAL INFORMATION

Maximum Operating Pressure: 25 Bar
Working Temperature Range -10°C to 110°C
Supplied With Red & Blue Handle

BOX OF
9
ONLY




BUTTERFLY HANDLE PRESS-FIT BALL VALVES

2 YEAR WARRANTY



TR-PPBV15R

15MM PRESS-FIT BALL VALVE WITH BLUE & RED BUTTERFLY HANDLE




TECHNICAL INFORMATION

Maximum Operating Pressure: 25 Bar
Maximum Inlet Temperature: 100°C
Suitable For Both M and V Jaws
Suitable For Use With EN1057 Copper, EN10312 Stainless Steel and EN10305-3 Carbon Steel Pipe
Leak Before Press System

BOX OF
15
ONLY

TR-PPBV22R

22MM PRESS-FIT BALL VALVE WITH BLUE & RED BUTTERFLY HANDLE

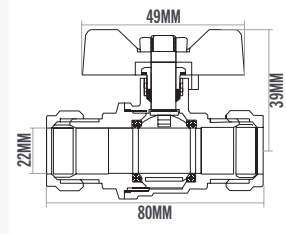


TECHNICAL INFORMATION

Maximum Operating Pressure: 25 Bar
Maximum Inlet Temperature: 100°C
Suitable For Both M and V Jaws
Suitable For Use With EN1057 Copper, EN10312 Stainless Steel and EN10305-3 Carbon Steel Pipe
Leak Before Press System

BOX OF
9
ONLY

TR28BBV

28MM FULL BORE COMPRESSION BALL VALVE WITH BLUE & RED BUTTERFLY HANDLE

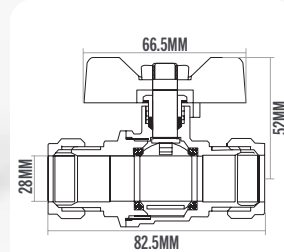

TECHNICAL INFORMATION

Maximum Operating Pressure: 25 Bar
Working Temperature Range -10°C to 110°C
Supplied With Red & Blue Handle

BOX OF
6
ONLY

inta
inspiration

Inspiration is a stunning collection of showers that combines style with safety.

inspired?

Take a look at the full collection by scanning the code

inta

We are pleased to introduce our new Product Guide for 2026.

Featuring our extensive Renewables, Plumbing and Heating, Commercial and Showering range.


WE ARE INTA.
RENEWABLES, PLUMBING AND HEATING, COMMERCIAL, SHOWERING

inta
PRODUCT GUIDE 2026

Take a look at 2026 Product Guide by scanning the code

TR-PPBV28R

28MM PRESS-FIT BALL VALVE WITH BLUE & RED BUTTERFLY HANDLE

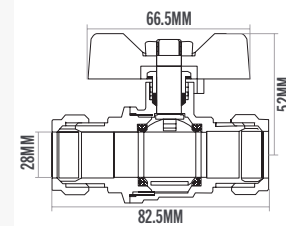

TECHNICAL INFORMATION

Maximum Operating Pressure: 25 Bar
Maximum Inlet Temperature: 100°C
Suitable For Both M and V Jaws
Suitable For Use With EN1057 Copper, EN10312 Stainless Steel and EN10305-3 Carbon Steel Pipe
Leak Before Press System

BOX OF
6
ONLY




LEVER HANDLE BALL VALVES

2 YEAR WARRANTY



TR15LBV

15MM FULL BORE COMPRESSION BALL VALVE WITH BLUE LEVER HANDLE & RED SLEEVE




TECHNICAL INFORMATION

Maximum Operating Pressure: 25 Bar
Working Temperature Range -10°C to 110°C
Supplied With Red & Blue Sleeve

BOX OF
12
ONLY

TR22LBV

22MM FULL BORE COMPRESSION BALL VALVE WITH BLUE LEVER HANDLE & RED SLEEVE

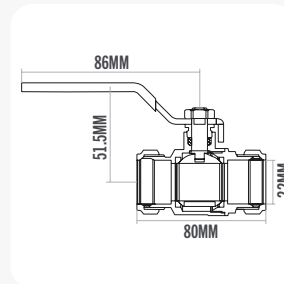


TECHNICAL INFORMATION

Maximum Operating Pressure: 25 Bar
Working Temperature Range -10°C to 110°C
Supplied With Red & Blue Sleeve

BOX OF
9
ONLY

TR42LBV

42MM FULL BORE COMPRESSION BALL VALVE WITH BLUE LEVER HANDLE & RED SLEEVE

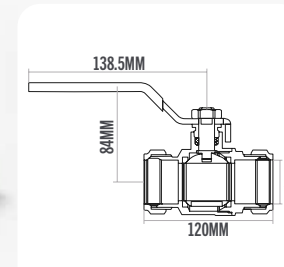


TECHNICAL INFORMATION

Maximum Operating Pressure: 25 Bar
Working Temperature Range -10°C to 110°C
Supplied With Red & Blue Sleeve

BOX OF
4
ONLY

TR54LBV

54MM FULL BORE COMPRESSION BALL VALVE WITH BLUE LEVER HANDLE & RED SLEEVE

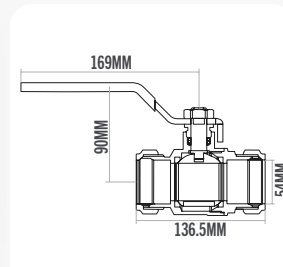

TECHNICAL INFORMATION

Maximum Operating Pressure: 25 Bar
Working Temperature Range -10°C to 110°C
Supplied With Red & Blue Sleeve

BOX OF
2
ONLY




LEVER HANDLE PRESS-FIT BALL VALVES

2 YEAR WARRANTY



TR28LBV

28MM FULL BORE COMPRESSION BALL VALVE WITH BLUE LEVER HANDLE & RED SLEEVE

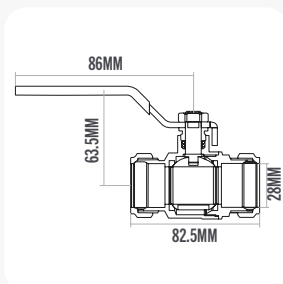


TECHNICAL INFORMATION

Maximum Operating Pressure: 25 Bar
Working Temperature Range -10°C to 110°C
Supplied With Red & Blue Sleeve

BOX OF
6
ONLY

TR35LBV

35MM FULL BORE COMPRESSION BALL VALVE WITH BLUE LEVER HANDLE & RED SLEEVE

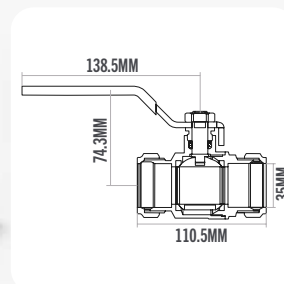


TECHNICAL INFORMATION

Maximum Operating Pressure: 25 Bar
Working Temperature Range -10°C to 110°C
Supplied With Red & Blue Sleeve

BOX OF
6
ONLY

TR-PFL15R

15MM PRESS-FIT BALL VALVE WITH BLUE LEVER HANDLE & RED SLEEVE

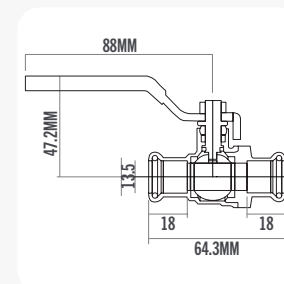


TECHNICAL INFORMATION

Maximum Operating Pressure: 25 Bar
Maximum Inlet Temperature: 100°C
Suitable For Both M and V Jaws
Suitable For Use With EN1057 Copper, EN10312 Stainless Steel and EN10305-3 Carbon Steel Pipe
Leak Before Press System

BOX OF
15
ONLY

TR-PFL22R

22MM PRESS-FIT BALL VALVE WITH BLUE LEVER HANDLE & RED SLEEVE

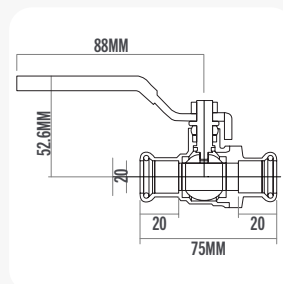

TECHNICAL INFORMATION

Maximum Operating Pressure: 25 Bar
Maximum Inlet Temperature: 100°C
Suitable For Both M and V Jaws
Suitable For Use With EN1057 Copper, EN10312 Stainless Steel and EN10305-3 Carbon Steel Pipe
Leak Before Press System

BOX OF
9
ONLY




LEVER HANDLE PRESS-FIT BALL VALVES

2 YEAR WARRANTY



TR-PFL28R

28MM PRESS-FIT BALL VALVE WITH
BLUE LEVER HANDLE & RED SLEEVE




TECHNICAL INFORMATION

Maximum Operating Pressure: 25 Bar
Maximum Inlet Temperature: 100°C
Suitable For Both M and V Jaws
Suitable For Use With EN1057 Copper, EN10312 Stainless Steel and EN10305-3 Carbon Steel Pipe
Leak Before Press System

BOX OF
6
ONLY

TR-PFL35R

35MM PRESS-FIT BALL VALVE WITH
BLUE LEVER HANDLE & RED SLEEVE

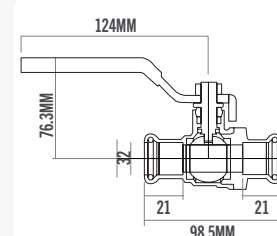


TECHNICAL INFORMATION

Maximum Operating Pressure: 25 Bar
Maximum Inlet Temperature: 100°C
Suitable For V Jaws Only
Suitable For Use With EN1057 Copper, EN10312 Stainless Steel and EN10305-3 Carbon Steel Pipe
Leak Before Press System

BOX OF
4
ONLY

TR-PFL42R

42MM PRESS-FIT BALL VALVE WITH
BLUE LEVER HANDLE & RED SLEEVE

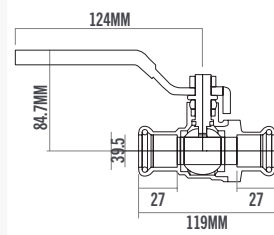


TECHNICAL INFORMATION

Maximum Operating Pressure: 25 Bar
Maximum Inlet Temperature: 100°C
Suitable For V Jaws Only
Suitable For Use With EN1057 Copper, EN10312 Stainless Steel and EN10305-3 Carbon Steel Pipe
Leak Before Press System

BOX OF
2
ONLY

TR-PFL54R

54MM PRESS-FIT BALL VALVE WITH
BLUE LEVER HANDLE & RED SLEEVE

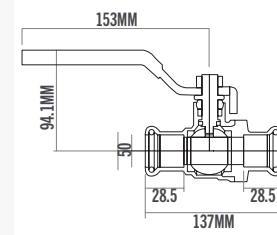

TECHNICAL INFORMATION

Maximum Operating Pressure: 25 Bar
Maximum Inlet Temperature: 100°C
Suitable For V Jaws Only
Suitable For Use With EN1057 Copper, EN10312 Stainless Steel and EN10305-3 Carbon Steel Pipe
Leak Before Press System

BOX OF
1
ONLY




PRESSURE REDUCING VALVES

2 YEAR WARRANTY



PRVG15

15MM TRADE-TEC PRESSURE REDUCING VALVE




TECHNICAL INFORMATION

Maximum Operating Pressure: 16 Bar
Pressure Adjustment Range: 0.5 - 6 Bar
Factory Pre-Set A: 3 Bar (Adjustable)
Maximum Inlet Temperature: 80°C

BOX OF
6
ONLY

PRVG22

22MM TRADE-TEC PRESSURE REDUCING
VALVE WITH 15MM REDUCERS

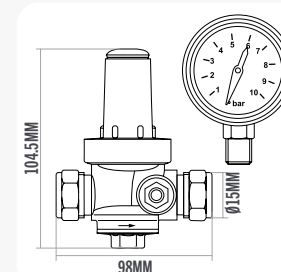

TECHNICAL INFORMATION

Maximum Operating Pressure: 16 Bar
Pressure Adjustment Range: 0.5 - 6 Bar
Factory Pre-Set A: 3 Bar (Adjustable)
Maximum Inlet Temperature: 80°C

BOX OF
6
ONLY




MAGNETIC FILTER SYSTEM

2 YEAR WARRANTY

TRMAGFIL22 - TRMAGFIL28


22MM / 28MM TRADE-TEC MAGNETIC FILTER

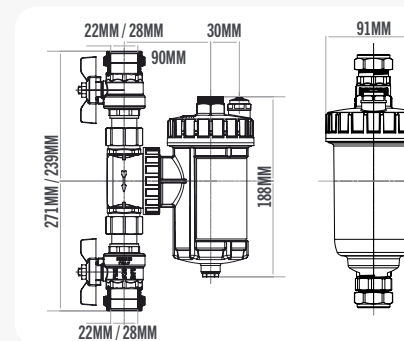

TECHNICAL INFORMATION

Maximum Temperature: 90°C
Maximum Pressure: 4 Bar
Inlet Connections: 22mm/28mm
Magnet: 11,000 Gauss

PRESSURE DROP GRAPH

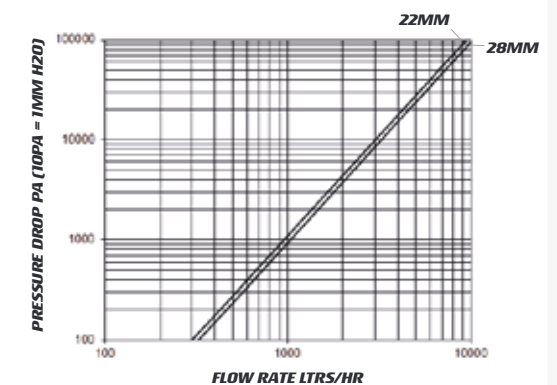

22MM KV (M3/H): 9.50

28MM KV (M3/H): 10.30

BOX OF
2
ONLY




AUTOMATIC AIR VENTS

2 YEAR WARRANTY

AAV007

AUTOMATIC AIR VENT 1/2" WITH CHECK VALVE




TECHNICAL INFORMATION

Maximum Peak Pressure: 10 Bar
Maximum Operating Pressure: 6 Bar
Maximum Peak Temperature: 110°C
Temperature Range: 0°C - 100°C

BOX OF
10
ONLY

TR15AAV

15MM AUTOMATIC AIR VENT

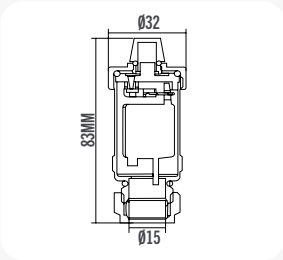

TECHNICAL INFORMATION

Maximum Peak Pressure: 10 Bar
Maximum Operating Pressure: 6 Bar
Maximum Peak Temperature: 110°C
Temperature Range: 0°C - 100°C

BOX OF
10
ONLY



TRADE-TEC HEATING VESSELS


2 YEAR WARRANTY

TRVES08 - TRVES12 - TRVES18 - TRVES25
TRADE-TEC HEATING VESSELS WITH BRACKET



TECHNICAL INFORMATION

Maximum Operating Pressure: 4 Bar
Maximum Temperature: 99°C
Pre Charge: 1 Bar
Membrane: Synthetic Rubber
G3/4" Connection




Size	A	B
8 Litre	217mm	338mm
12 Litre	267mm	334mm
18 Litre	317mm	299mm
25 Litre	317mm	341mm

TRVES08NB - TRVES12NB - TRVES18NB - TRVES25NB
TRADE-TEC HEATING VESSELS WITHOUT BRACKET



TECHNICAL INFORMATION

Maximum Operating Pressure: 4 Bar
Maximum Temperature: 99°C
Pre Charge: 1 Bar
Membrane: Synthetic Rubber
G3/4" Connection

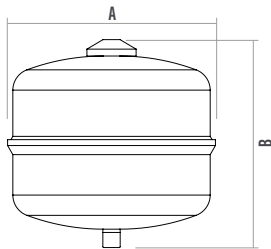

Size	A	B
8 Litre	217mm	338mm
12 Litre	267mm	334mm
18 Litre	317mm	299mm
25 Litre	317mm	341mm



TRADE-TEC SEALED SYSTEM KIT

2 YEAR WARRANTY

TRSSK34

TRADE-TEC SEALED SYSTEM KIT




TECHNICAL INFORMATION

Complies With G24.1 G24.2
Compatible With A Range Of Expansion Vessels
Provides Quick and Flexible Installation
Suitable For Retro Fit or New Build Installations

BOX OF
1
ONLY

TRVSA016

TRADE-TEC SHOCK ARRESTOR 0.16 LITRE CAPACITY

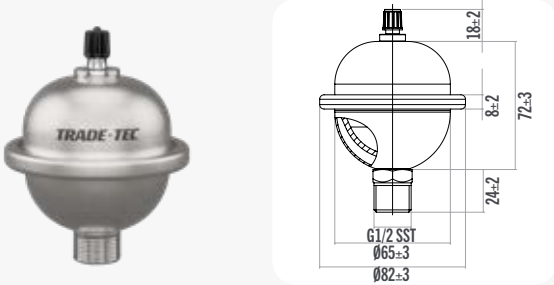

TECHNICAL INFORMATION

Maximum Working Pressure: 15 Bar
Maximum Working Temperature: 99°C
Maximum Membrane Temperature: 70°C
Pre Charge: 3.5 Bar
Connection: G1/2"


BOX OF
1
ONLY

TRPVES08NB • TRPVES12NB • TRPVES19NB • TRPVES24NB
TRADE-TEC POTABLE VESSELS WITHOUT BRACKET



TECHNICAL INFORMATION

Maximum Operating Pressure: 8 Bar
Maximum Temperature: 99°C
Max Membrane Temperature: 70°C
Pre Charge: 2.5 Bar
Connection: G3/4"

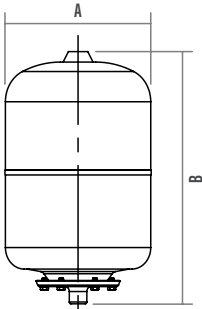

Size	A	B
8 Litre	199mm	335mm
12 Litre	270mm	310mm
19 Litre	270mm	411mm
24 Litre	270mm	485mm



TRADE-TEC POTABLE VESSELS


2 YEAR WARRANTY

TRPVES08 • TRPVES12 • TRPVES19 • TRPVES24
TRADE-TEC POTABLE VESSELS WITH BRACKET



TECHNICAL INFORMATION

Maximum Operating Pressure: 8 Bar
Maximum Temperature: 99°C
Max Membrane Temperature: 70°C
Pre Charge: 2.5 Bar
Connection: G3/4"

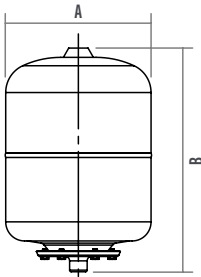


Size	A	B
8 Litre	199mm	335mm
12 Litre	270mm	310mm
18 Litre	270mm	411mm
24 Litre	270mm	485mm

TRPVES35 • TRPVES50 • TRPVES80 • TRPVES100
TRADE-TEC POTABLE VESSELS WITHOUT BRACKET



TECHNICAL INFORMATION

Maximum Operating Pressure: 8 Bar
Maximum Temperature: 99°C
Max Membrane Temperature: 70°C
Pre Charge: 2.5 Bar
Connection: G1"

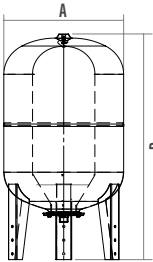

Size	A	B
35 Litre	380mm	420mm
50 Litre	380mm	788mm
80 Litre	380mm	878mm
100 Litre	450mm	848mm



Intatec Limited

Airfield Industrial Estate, Hixon, Staffordshire ST18 0PF
t. 01889 272180 e. sales@intatec.co.uk www.intatec.co.uk



Proud to be a leading British Brand