




Product

TF9923CP - Exposed Timed Flow Shower (3 Seconds)
TF992CP - Exposed Timed Flow Shower (15 Seconds)
TF99230CP - Exposed Timed Flow Shower (30 Seconds)
TF9973CP - Concealed Timed Flow Shower (3 Seconds)
TF997CP - Concealed Timed Flow Shower (15 Seconds)
TF99730CP - Concealed Timed Flow Shower (30 Seconds)


Technical Specification

Max Inlet Pressure (static):	10 Bar
Min Inlet Pressure (dynamic):	0.2 Bar
Max Inlet Temperature:	65°C
Flow Tolerances:	3 ± 1 Seconds at 1 Bar
	15 ± 3 Seconds at 1 Bar
	30 +5/-10 Seconds at 1 Bar

Exposed

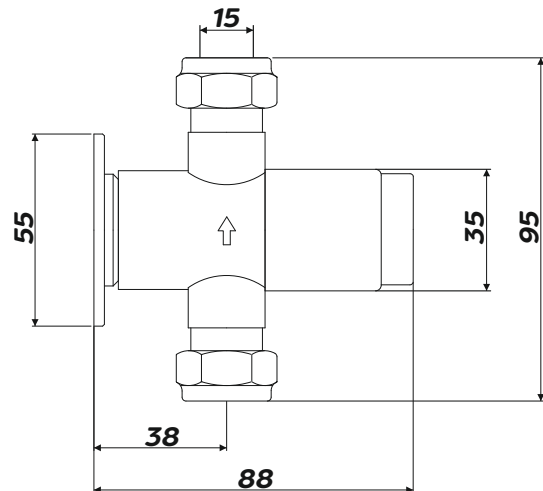

Concealed

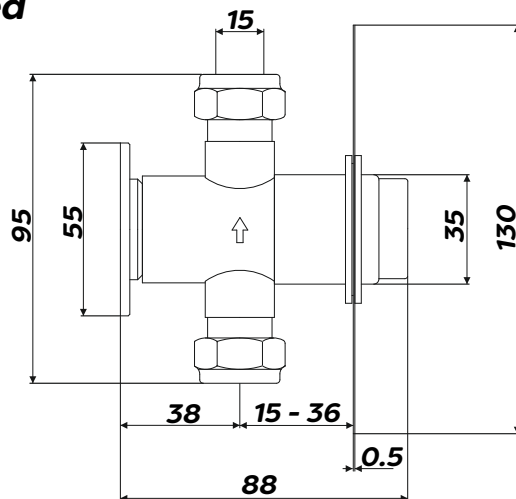

Additional Information

Simple non-concussive push button operation

Automatically shuts off the flow of water after a set time, reducing water waste

Exposed or concealed options available

Wide range of vandal resistant shower heads and spouts to suit

Sturdy vandal resistant design makes it ideal for high use public & commercial applications

Designed to be used with a thermostatic mixing valve, such as our range of Intamix TMV's

Flow Rates (Open Outlet)

Pressure (Bar)	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0
Flow Rate (L/m)	7	9	12	13.5	15	16.5	18	19.5	21.5	23